

# OPS500-501 NEW

Open Pluggable Specification (OPS) Digital Signage Player with 6th/7th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, Intel® Q170 and AMT 11.0

## Features

- Intel® Open Pluggable Specification (OPS compliance)
- 6th/7th gen Intel® Core™ i7/i5/i3 & Celeron® processors (Skylake/Kaby Lake)
- DDR4-2133 SO-DIMM, up to 16GB
- 1 PCI Express Mini Card slot
- Easy installation and maintenance
- HDMI for 2nd ultra HD display with 4K@60 Hz resolution
- Intel® AMT (Active Management Technology) 11.0




## Specifications

Main System	CPU	LGA1151 socket 6th/7th gen Intel® Core™ i7/i5/i3 & Celeron® processor
	Chipset	Intel® Q170
	System Memory	1 x 260 pin DDR4-2133 SO-DIMM, up to 16GB
	Storage	1 x 2.5" SATA HDD tray 1 x mSATA (option)
	Watchdog Timer	255 levels, 1-255 sec.
I/O		2 x USB 3.0
		1 x USB 2.0
		1 x 10/100/1000 Mbps Ethernet (Intel® i219LM)
		1 x HDMI with 4K resolution
		1 x RS-232 (COM 2)
		1 x Power on/off button
		1 x Reset button
		1 x Audio (Line-out)
		1 x Audio (Mic-in)
		1 x DisplayPort (4K@60 Hz via OPS JAE interconnector)
		1 x HDMI 2.0 (4K@60 Hz via OPS JAE interconnector)
		2 x USB 2.0 (via OPS JAE interconnector)
		1 x USB 3.0 (via OPS JAE interconnector)
		1 x Audio (Line out, via OPS JAE interconnector)
		1 x UART (TX/RX, via OPS JAE interconnector) (COM1)
	1 x 12 VDC power input by adapter option	
Indicator		1 x LED for system power on
		1 x LED for HDD active
WiFi		802.11 b/g/n (optional)
Expansion Slot		1 x full-size PCIe Mini Card (USB + PCI Express + SATA signal)
Dimensions		200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18")
Packing Dimension		270 mm (10.63") (W) x 197 mm (7.76") x 70mm (2.76")
Weight (net/gross)		1 kg (2.21lb)/1.5 kg (3.3 lb)
Environmental		0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s)

## Packing

- 1 x Driver CD
- 1 x Thermal grease
- 2 x M2 x 5 screw
- 2 x M4 x 6 screw

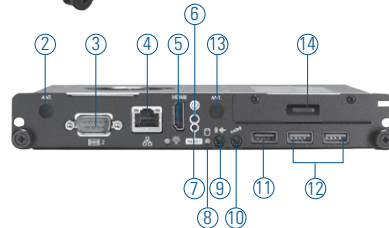

- |                     |                     |                       |
|---------------------|---------------------|-----------------------|
| 1. JAE TX-25A       | 6. Power switch     | 11. USB 2.0 x 1       |
| 2. Optional antenna | 7. Reset            | 12. USB 3.0 x 2       |
| 3. RS-232           | 8. HDD indicator    | 13. Optional antenna  |
| 4. Ethernet         | 9. Audio (Line-out) | 14. 2.5" SATA HDD     |
| 5. HDMI output      | 10. Audio (Mic-in)  | 15. 12VDC power input |



## Optional OS Installation

Windows® 8.1, Windows® 10

## Ordering Information

### Standard


OPS500-501 OPS digital signage player with LGA1151 socket Intel® Core™ i7/i5/i3 & Celeron® processors and iAMT 11.0

### Optional

AX93167 OPS docking board with 4K resolution  
AX93190 OPS docking board with 4K/60 Hz resolution+WLAN kit

\* Specifications and certifications may vary contingent on options.

## Dimensions

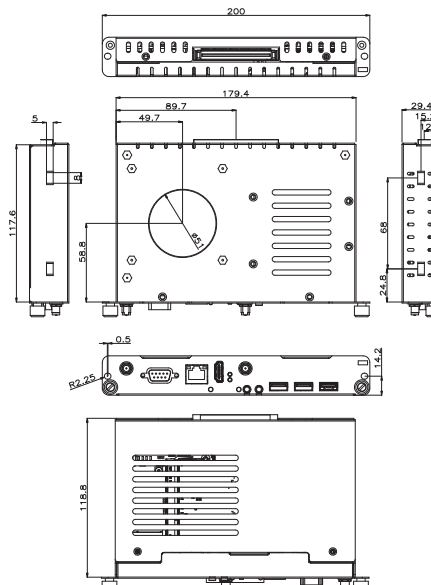

\* All specifications and photos are subject to change without notice.

