



RoHS CE FCC CCC

Specifications



Processor	CPU	Intel® LGA1151 Socket 8 th Gen.Processor
	Chipset	Intel® H310C/Q370/B360
	BIOS	AMI Source Code
Memory	Type	DDR4
	Socket	2 x SO-DIMM
	Max Size	32GB
Graphics	DP (80Pin JAE)	1 x DP (Max. 4096 x 2304 @60Hz)
	HDMI (80Pin JAE)	1 x HDMI (Max.4096 x 2304@60Hz(H310C); Max.4096 x 2304@24Hz(Q370/B360))
	HDMI	1 x HDMI (Max. 4096 x 2304 @24Hz)
Network	Controller	Intel® I219LM Gigabit Ethernet
	Interface	1 x RJ45
I/O	USB	4 x USB3.1
	Audio	1 x 2-in-1 Headset (MIC-IN & AUDIO-OUT)
	Serial Port	1 x RS232
	M.2 1#	1 x M.2 (2230) for WiFi/BT
	M.2 2#	1 x M.2 (2242/2280) for SSD
JAHC	WatchDog Timer	0~255 Second Time Out Support
	Auto Power On	Power Activated Automatically Start
	RTC	Set Up Independently Every day, A Week as a Cycle
	Wake On Lan	Yes
Storage	M.2	1 x M.2 (2242/2280) for SSD
Operation System	Windows	Windows 10 (64-Bit)
	Linux	Supported
Power	Power Type	DC-IN
	Power Adapter	19V/3.42A
Mechanical	Dimensions (W x D x H)	200mm x 119mm x 30mm(7.87" x 4.69" x 1.18")
	Construction	Metal
	Color	Black
Environment	Operating Temperature	0°C ~ 40°C (32 °F ~ 104 °F) at 0.7m/s Air Flow
	Relative Humidity	95% @ 40°C (non-condensing)
Certification	Certification	CE, FCC Class B, CCC

Packing List


Part Number	Description	Amount	Mark
-	PC68	1	200mm x 119mm x 30mm
-	Drive Disk	1	
-	User Manual	1	
-	WiFi Antenna	2	

Features

- Intel® 8th Generation Core Processors
- 2 x SO-DIMM DDR4, Up to 32GB
- 1 x JAE (DP/HDMI), 1 x HDMI, Supporting 4K Display
- 1 x M.2 (2242/2280) for SSD
- 4 x USB3.1, 1 x RS232
- 1 x RJ45, 1 x M.2 (2230) for WiFi/BT
- Support Intel vPro Technology (Optional)

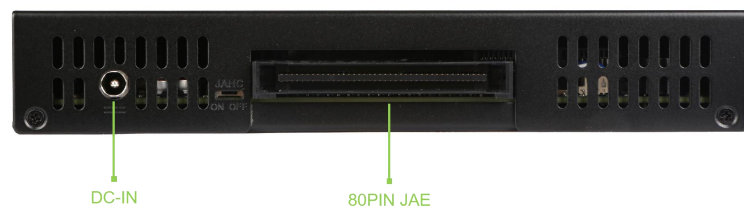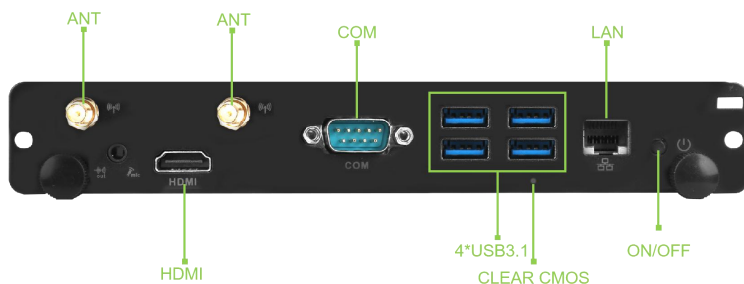

Dimensions and Drawing

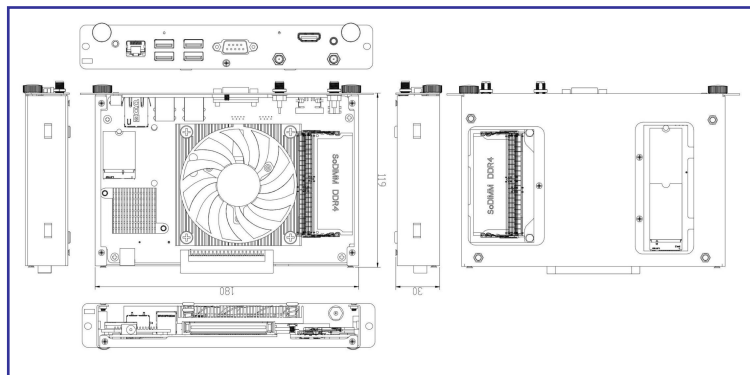

Ordering Information

Part Number	Description
PC68-N1-000040NOG	CPU: Intel® LGA1151 Socket 8 th Gen.Processor