

SCS2365

23.6" TFT LCD, 1000 nits, 1920x1920, Circle SDM Solutions



SDM Ready Circle Display

Key Features

- 23.6" Circle Display
- High Brightness 1000nits
- Aspect Ratio 1:1
- Programmable Pattern RGB
- Circle Lighting
- Support Intel® SDM-S/SDM-L
- Wifi Support

Product Specification

SCS2365	
Description	23.6" TFT LCD,1000nits,1920x1920 Circle SDM Solutions
Screen size	23.6"
Display area (mm)	596.16(H) x 596.16(V)
Brightness	1000 cd/m2
Resolution	1920x1920
Aspect ratio	1 : 1
Contrast ratio	600 : 1
Pixel pitch (mm)	0.3105(H) x 0.3105(V)
Pixel per inch (PPI)	82
Viewing angle	178°(H),178°(V)
Color saturation (NTSC)	77%
Display colors	16.7M
Response time (Typical)	8ms
Video interface	SDM-S/SDM-L interface
Input power	AC100~240V
Power consumption	60W (Panel Model Only)
Dimensions (mm)	890 x 890 x 77.2
Bezel size (U/B/L/R)	
Weight (Net)	24kg
Mounting	VESA 400x200, 400x400
OSD key	5 Keys (Power Switch, Menu, +, Exit -)

OSD control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Operating temperature	0 °C ~ 50 °C
Storage temperature	-20 °C ~ 60 °C
Product approval	CE, FCC

SDM From Factor list

Part Number	Description
ASDM-APL5	SDM-L, Intel Apollo Lake CPU,COM/2USB/LAN

Page.33



ASDM-APL6	SDM-S, Intel Apollo Lake CPU.2USB/LAN, LPDDR4-4GB./ eMMC-32GB
-----------	---

Page.34




* Slightly larger than a credit card

Ordering Information

Part Number	Description
SCS2365-YNB-M01	23.6",1000nits,1920x1920.LID33C,AD9131,SDM. O/B,circle lighting.AC100~240V,V1

Dimensions

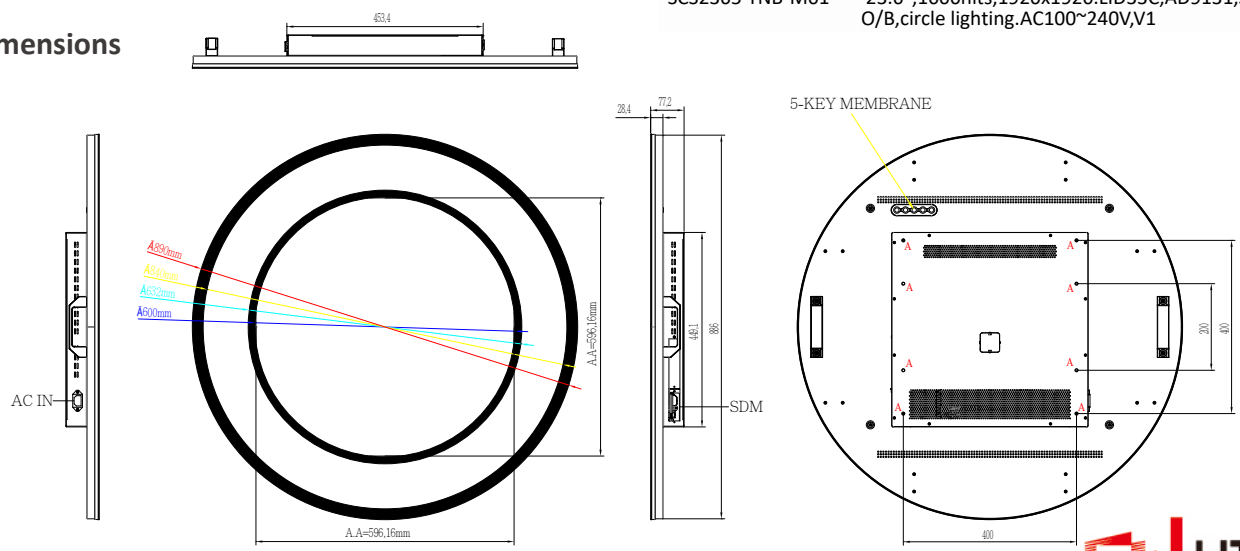

*All specifications and photos are subject to change without prior notice