SSF/SSH 1722
17.2"Resizing LCD,400 nits LED backlight, 1366x510 ultra wide aspect ratio 16:6

SSF/SSH1722 is an innovative ultra-wide, sunlight readable, LED backlight LCD display. it provides LCD panel with specific ratios for digital signage, public transportation, exhibition hall, department store, vending machine and industrial applications. Incorporating with A.D. control board and backlight design, it is high brightness and sunlight readable panel, can display high-quality video with energy-efficient.

Key Features
- Resizing LCD
- Ultra Wide Screen (16 : 6)
- Sunlight Readable
- LED Backlight
- High Brightness 400 nits
- Low Power Consumption
- High Uniformity
- Wide Dimming
- Life Expectancy (70,000hrs)
- Slim Bezel

Specifications		Preliminary
Model No.	**SSF/SSH1722**	
Description	17.2" Resizing LCD, 400 nits LED backlight, 1366x510	
Display Area	409.8 x 153.0 mm	
Brightness	400 cd/m²	
Resolution	1366 x 510	
Aspect Ratio	16 : 6	
Contrast Ratio	1500:1	
Pixel Pitch (mm)	0.3 x 0.3	
Viewing Angle	170°(H), 160°(V)	
Display Colors	16.7M	
Response Time (Typical)	5 ms	
Sync	LVDS	
Power Consumption	15 W	
Dimensions (mm)	430.4 x 178.4 x 12.0 mm	
Weight (Net)	0.9 kg	
LED Driving Board	**LID17**	
Control Board (Optional)	**AD2662GDHM**	
☐AD6038GD	VGA + DVI + HDMI	
☐Others		
F / R Control Button	5 Key / 4 Key	
☐4 Key	Power Switch, Menu, Select (+,-),	
☐5 Key	Power Switch, Menu, Select (+,-),Auto	
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock…	
Optional	☐ **Touch Screen**	

Specifications are subject to change without notice.
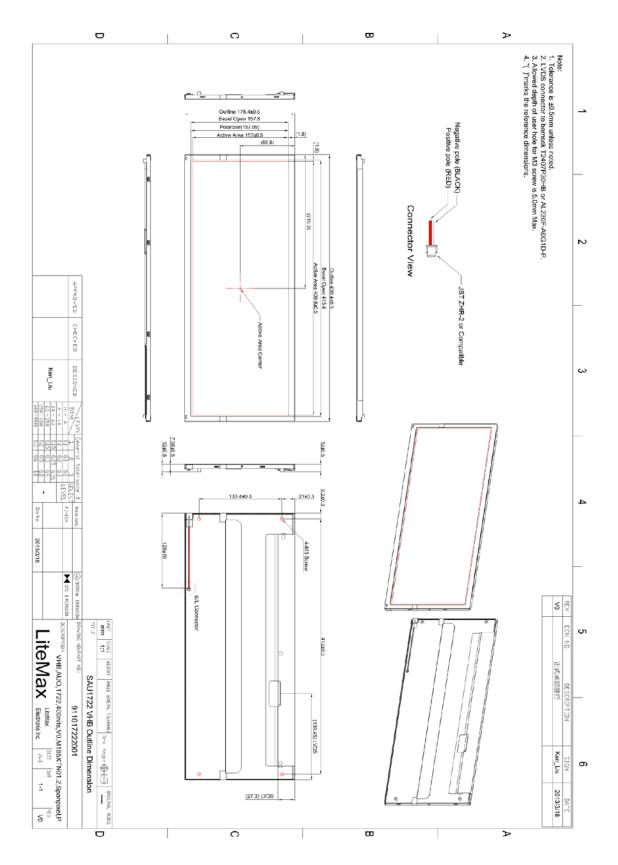*All brands or product names are trademarks or registered trademarks of their respective companies.*

SSF= Panel+ LED Driving Board
SSH= Panel+ LED Driving Board + Control Board

Mechanical Drawing

Outline Dimensions

Unit: mm

Ordering Information

Model Name	Description
SSF1722-ANN-A01	17.2",400nits,1366*512,LID17A.V01(4 in 1)
SSH1722-ANN-G01	17.2",400nits,1366*512,LID17A.AD2662GDHM,4 in 1,V1

Optional Accessories

Part Number	Description
840612051211	ADAPTER,AC/DC,12V/5.4A,64.8W,Power-Din-4P,Atech.A0605TD-120054.Efficency-level-6,R
810618301010 (Optional)	CABLE.POWER.AC.1830mm.(US Type).3PIN PLUG TO SOCKET.SVT(SPT-2)18AWG 3C BLACK.P.
810618301090 (Optional)	CABLE,POWER,AC,1830mm.(EU Type) 3PIN PLUG TO.SOCKET,H05VV-F 3G.0.75MMSQ BLACK,P
810618301050 (Optional)	CABLE,POWER,AC,1830mm.UK(FUSE) 3PIN PLUG TO.SOCKET,H05VV-F 3C(3G) 0.75MMSQ BLACK,P
810618301170 (Optional)	CABLE.POWER,AC,1830mm. (AU Type) 3PIN PLUG TO 2P SOCKET.LTSA 0.75MMSQ BLACK,P
810618301031 (Optional)	CABLE.POWER.AC.1830mm.(JP Type).2PIN PLUG Y TERMINAL TO. SOCKET.VCTF 3C 0.75MMSQ BLACK,P