
In-Window Display Series - SVFSHD320


Outstanding Brightness with Quiet Operation



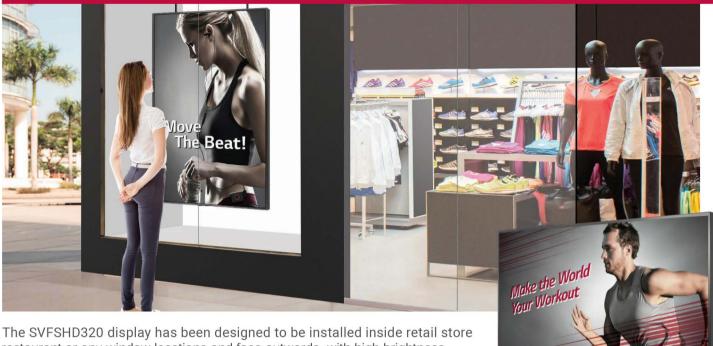

The SVFSHD320 display has been designed to be installed inside retail store restaurant or any window locations and face outwards, with high brightness performance that is designed to attract attention, evening during the daytime. Its low power consumption and the silent fans create low noise makes it extremely energy efficient.

Key Features

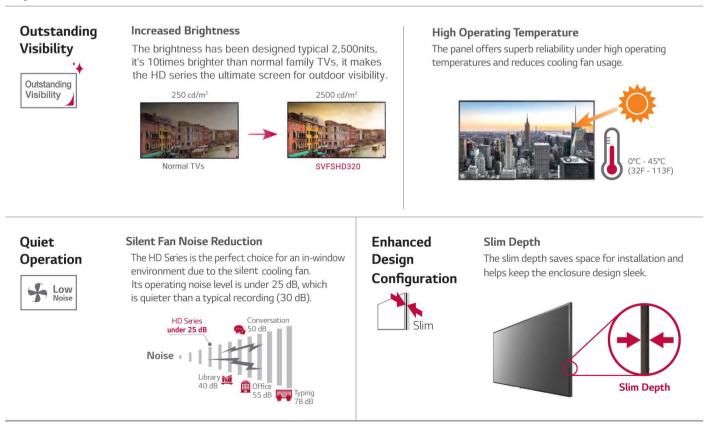

SUREVIEW

In-Window Display Series - SVFSHD320

Outstanding Brightness with Quiet Operation





Screen Size

32"

(31.55" measured diagonally)

HD Series

- Brightness: 2,500 cd/m² Typical, customized 1500~3000cd/m²
- Interface : HDMI,USB,VGA

Other Features

Cost Effective

 Low Power Consumption Using The M+ Panel The M+ panel offers excellent energy efficiency and cost savings and decreases power consumption compared to conventional RGB panels



Smart Brightness Control

The auto brightness sensor adjust backlight brightness according to the ambient brightness to save power energy and protect the human eye.



Connectivity

DC12V	HDMI	VGA	PC	USB
power in	in	in	Audio in	




SURE**WIEW**

In-Window Display Series - SVFSHD320




Outstanding Brightness with Quiet Operation

Dimensions (unit : mm)

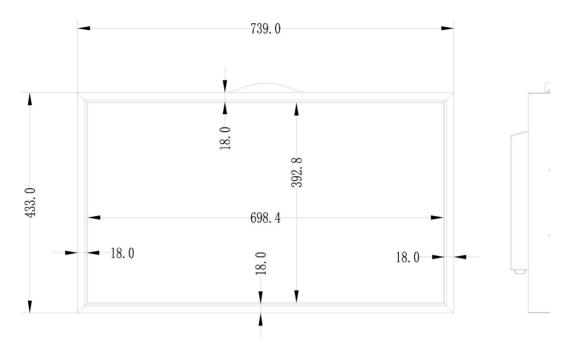



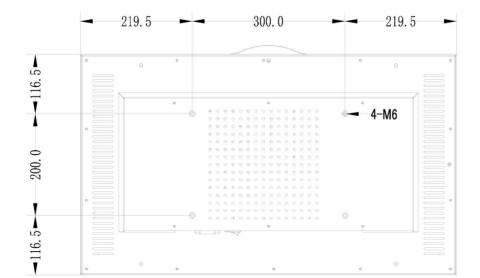

SURE**WIE**W

Specifications

SUREMIEW

HD Series		SVFSHD320	
	Screen Size	32" (31.55" measured diagonally)	
PANEL	Panel Technology	IPS	
	Aspect Ratio	16:9	
	Native Resolution	1,920 × 1,080 (FHD)	
	Brightness	2,500cd/m (Typ.), Customized 1500~3000cd/m ²	
	Contrast Ratio	1,000:1	
	Dynamic CR	500,000:1	
	Viewing Angle (H x V)	178 x 178	
	Surface Treatment	/	
	Orientation	Landscape & Portrait	
	Input	HDMI, VGA, USB	
CONNECTIVITY	Output	Audio out	
	External Control	IR Receiver, Auto-Dimming Sensor	
	Bezel Color	Black	
	Bezel Width	18.0mm(T/B/L/R)	
	Monitor Dimension (W x H x D)	739.00x433.00x85.00mm	
PHYSICAL SPECIFICATION	Weight (Head)	9.7kg	
SPECIFICATION	Carton Dimensions (W x H x D)	TBD	
	Packed Weight	TBD	
	VESA [™] Standard Mount Interface	200x300 mm	
SPECIAL FEATURES		Temperature sensor, Auto brightness sensor, Silent fans cooling Source selection, Brightness/Contrast/Backlight select Energy saving, Smart energy saving	
ENVIRONMENT CONDITIONS	Operation Temperature Range	0°C to 45°C (w/o Direct sunlight) 0°C to 35°C (Direct sunlight)	
	Operation Humidity Range	10% to 80%	
	Power Supply	100-240 V~, 50/60 Hz	
	Power Type	Built-In Power	
POWER	Power Concumption Typ	100W	
	Power Consumption Max	110W	
STANDARD	Safety	/	
(CERTIFICATION)	EMC	CE	
	Included Accessories	Remote controll(w/o battery) ,AC power plug	
ACCESSORIES	Optional Accessories	Mounting brachets(wall mount,roof hanging,floor stand)	

