

In-Window Display Series - SVFSHD490

Outstanding Brightness with Quiet Operation



Screen Size

49"

HD Series

- Brightness : 2,500 cd/m² Typical, customized 1500-5000cd/m²
- Interface : HDMI,USB,VGA



Other Features

Cost Effective



Low Power Consumption Using The M+ Panel

The M+ panel offers excellent energy efficiency and cost savings and decreases power consumption compared to conventional RGB panels




Conventional



Max 130 W
Reduced


Smart Brightness Control

The auto brightness sensor adjust backlight brightness according to the ambient brightness to save power energy and protect the human eye.

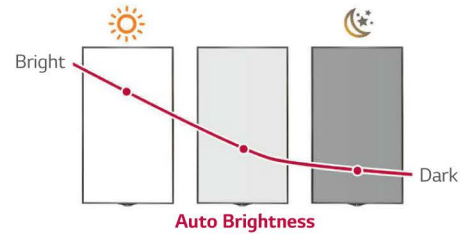

Connectivity


| | | | | |
|---------------------------|--------------------|-------------------|------------------------|------------|
| DC12V power in | HDMI in | VGA in | PC Audio in | USB |
|---------------------------|--------------------|-------------------|------------------------|------------|

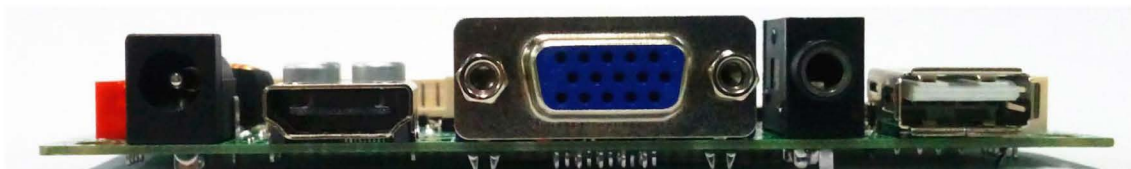

In-Window Display Series - SVFSDH490

Outstanding Brightness with Quiet Operation

Dimensions (unit : mm)

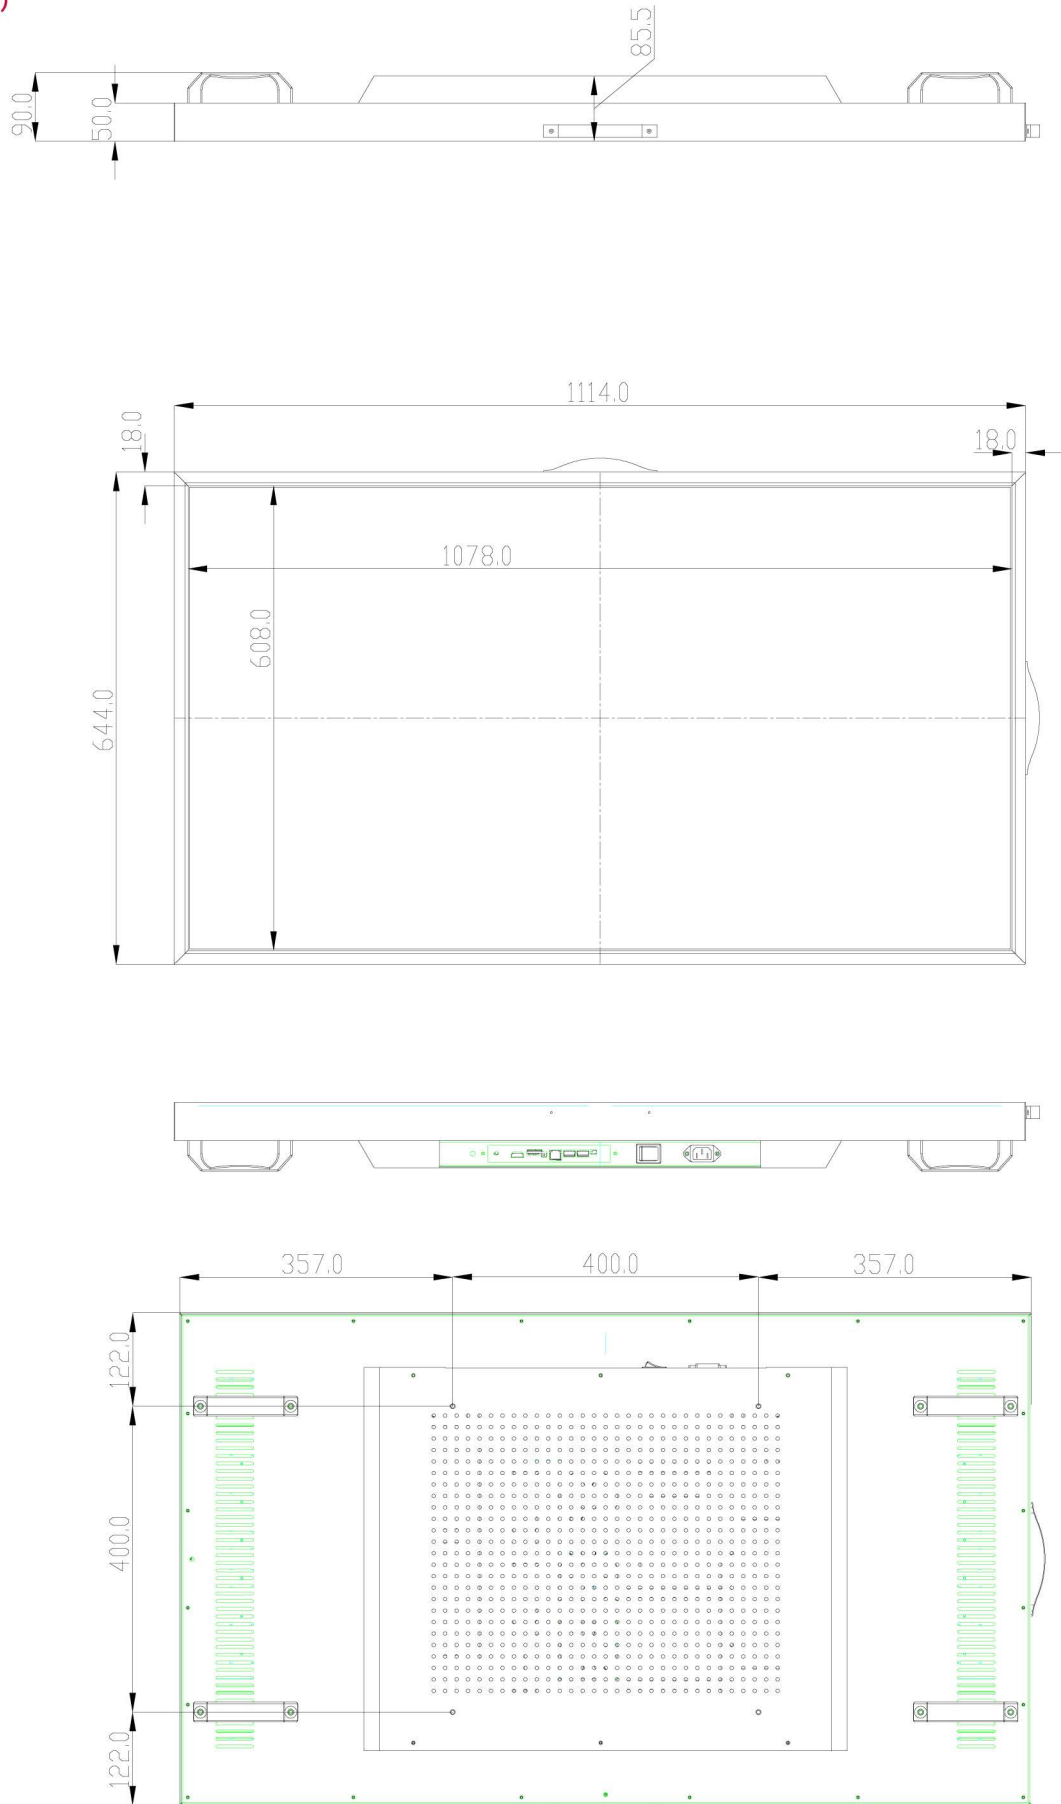

| HD Series | | SVFSD490 |
|--------------------------|---|--|
| PANEL | Screen Size | 49' |
| | Panel Technology | IPS |
| | Aspect Ratio | 16:9 |
| | Native Resolution | 1,920 x 1,080 (FHD) |
| | Brightness | 2,500cd/m (Typ.), Customized 1500~5000cd/m ² |
| | Contrast Ratio | 1,000:1 |
| | Dynamic CR | 500,000:1 |
| | Viewing Angle (H x V) | 178 x 178 |
| | Surface Treatment | / |
| | Orientation | Landscape & Portrait |
| CONNECTIVITY | Input | HDMI, USB, VGA |
| | Output | |
| | External Control | IR Receiver, Auto-Dimming Sensor |
| PHYSICAL SPECIFICATION | Bezel Color | Black |
| | Bezel Width | 18mm(T/B/L/R) |
| | Monitor Dimension (W x H x D) | 1114.00x644.00x85.50mm |
| | Weight (Head) | 25.0kg |
| | Carton Dimensions (W x H x D) | TBD |
| | Packed Weight | TBD |
| | VESA™ Standard Mount Interface | 400x400 mm |
| SPECIAL FEATURES | Temperature sensor, Auto brightness sensor, Silent fans cooling Source selection, Brightness/Contrast/Backlight select Energy saving, Smart energy saving | |
| ENVIRONMENT CONDITIONS | Operation Temperature Range | 0°C to 45°C (w/o Direct sunlight) 0°C to 35°C (Direct sunlight) |
| | Operation Humidity Range | 10% to 80% |
| POWER | Power Supply | 100-240 V~, 50/60 Hz |
| | Power Type | Built-In Power |
| | Power Consumption | Typ 130W Max 143W |
| STANDARD (CERTIFICATION) | Safety | / |
| | EMC | CE |
| ACCESSORIES | Included Accessories | Remote controll(w/o battery) ,AC power plug |
| | Optional Accessories | / |