

In-Window Display Series - SVFSDH550

Sureview 55" High Bright In-Window Display




Screen Size

55"
(54.64" measured diagonally)

HD Series

- Brightness : 2,500 cd/m² Typical, customized 1500~5000cd/m²
- Interface : HDMI,USB,VGA

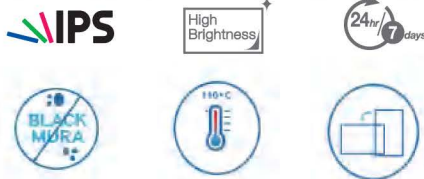

Other Features

Cost Effective




Low Power Consumption Using The M+ Panel

The M+ panel offers excellent energy efficiency and cost savings and decreases power consumption compared to conventional RGB panels




Smart Brightness Control

The auto brightness sensor adjust backlight brightness according to the ambient brightness to save power energy and protect the human eye.

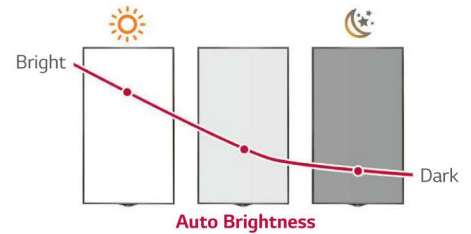

Connectivity



DC12V power in	HDMI in	VGA in	PC Audio in	USB
-----------------------	----------------	---------------	--------------------	------------

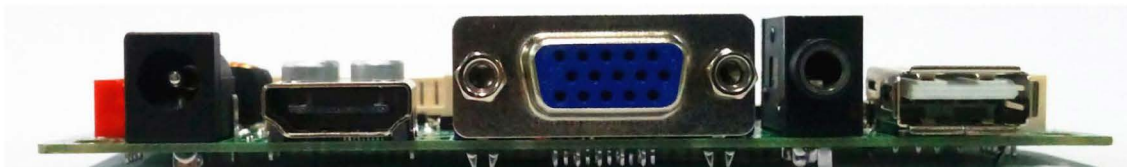

In-Window Display Series - SVFSDH550

Sureview 55" High Bright In-Window Display

Dimensions (unit : mm)

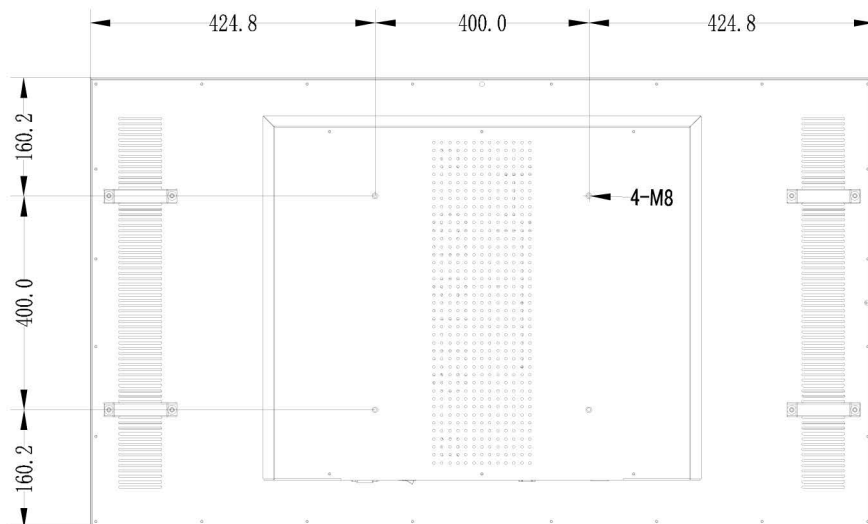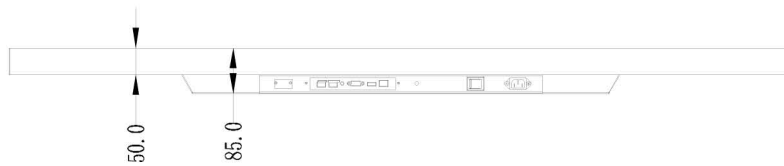

HD Series		SVFSD550
PANEL	Screen Size	55" (54.64" measured diagonally)
	Panel Technology	IPS
	Aspect Ratio	16:9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	2,500cd/m (Typ.), Customized 1500-5000cd/m ²
	Contrast Ratio	1,000:1
	Dynamic CR	500,000:1
	Viewing Angle (H x V)	178 x 178
	Surface Treatment	/
CONNECTIVITY	Orientation	Landscape & Portrait
	Input	HDMI, USB, VGA
	Output	
	External Control	IR Receiver, Auto-Dimming Sensor
PHYSICAL SPECIFICATION	Bezel Color	Black
	Bezel Width	18mm(T/B/L/R)
	Monitor Dimension (W x H x D)	1249.60x720.40x85.00mm
	Weight (Head)	33.0kg
	Carton Dimensions (W x H x D)	TBD
	Packed Weight	TBD
	VESA™ Standard Mount Interface	400x400 mm
SPECIAL FEATURES	Temperature sensor, Auto brightness sensor, Silent fans cooling Source selection, Brightness/Contrast/Backlight select Energy saving, Smart energy saving	
ENVIRONMENT CONDITIONS	Operation Temperature Range	0°C to 45°C (w/o Direct sunlight) 0°C to 35°C (Direct sunlight)
	Operation Humidity Range	10% to 80%
POWER	Power Supply	100-240 V~, 50/60 Hz
	Power Type	Built-In Power
	Power Consumption	Typ 300W Max 330W
STANDARD (CERTIFICATION)	Safety	/
	EMC	CE
ACCESSORIES	Included Accessories	Remote control(w/o battery) ,AC power plug
	Optional Accessories	/