SVL55HD9-T

55″ Freestanding PCAP Touch Screen Poster · 10-Point Touch

55″
DISPLAY SIZE

FREESTANDING POSTER

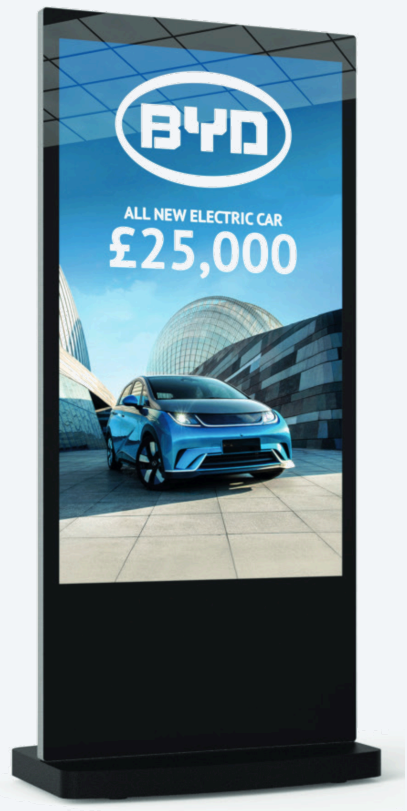

The SVL55HD9-T is a 55″ freestanding PCAP touch screen poster built for interactive experiences. Optimum sensitivity to touch gestures and rapid response times give users a smooth, effortless experience — no repeated taps or waiting for a touch to register. A tempered glass face with oleophobic coating resists fingerprint residue and improves gesture smoothness, while rounded corners, an aluminium surround and giant tablet styling protect the internals in public spaces. The internal locker takes a small PC or media player powered from inside, or run content on the built-in Android player.

KEY FEATURES

- 10-Point PCAP Touch
- Ultra Responsive Interactivity
- 450 cd/m² IPS Panel
- 24/7 Commercial Use
- Internal Locker / AV Inputs
- Integrated Castors
- Surface Plasma Treatment
- Oleophobic Coating
- Piano Black Version Available

AT A GLANCE

55″ PANEL SIZE	**1080×1920** RESOLUTION	**450 nit** BRIGHTNESS
5000:1 CONTRAST	**10-pt** PCAP TOUCH	**69.5 kg** NET WEIGHT

IDEAL APPLICATIONS

- Retail stores & shopping centres
- Showrooms & exhibition stands
- Transport hubs & wayfinding
- Hotel lobbies & hospitality
- Reception & waiting areas
- Events, promotions & pop-ups

Technical Specifications

PANEL

Panel size	55″ IPS
Resolution	1080 × 1920 (portrait)
Display area	681.4 × 1210.6 mm
Aspect ratio	16:9
Brightness	450 cd/m²
Colour	16.7M
Viewing angle	178°
Contrast ratio	5000:1

TOUCH

Touch technology	PCAP (projected capacitive)
Touch points	10
Glass hardness	7H minimum
Coating	Oleophobic · surface plasma treated

MECHANICAL

Unit size (W×H×D)	1911.5 × 744 × 41.2 mm
Package size (W×H×D)	2020 × 900 × 600 mm
Footprint (W×D)	744 × 500 mm
Net / gross weight	69.5 / 93 kg
Controls	No accessible buttons

AUDIO, AV & POWER

Speakers	10W, 4Ω ×2
Video inputs	HDMI, VGA
Audio input	3.5 mm audio socket
Power consumption	>155W
Input voltage	AC 110–240V 50/60Hz

INTERNAL COMPUTER

Operating system	Android 7.1
CPU	Quad-Core ARM Cortex-A17 @1.6GHz
GPU	Quad-Core ARM Mali-T764
RAM	DDR3 2GB
Internal storage	8GB eMMC
USB	1 × USB (OTG/HOST), 1 × USB (HOST)
LAN	100M/1000M Ethernet
Wi-Fi	802.11 b/g/n/ac
Bluetooth	4.2
Graphics engine	OpenGL ES 3.1, OpenCL 1.1, Direct3D 11.1

ENVIRONMENTAL & WARRANTY

Operating temp.	0°C to 40°C
Storage temp.	-10°C to 55°C
Operating humidity	10% to 80%
Storage humidity	10% to 80%
Accessories included	Remote, manual, power & USB cable, aerial
Warranty	3 year · lifetime support

Specifications and availability are subject to change without notice. Trademarks are the property of their respective owners. Errors and omissions excepted.

Technical Drawing

All dimensions in millimetres — not to scale.

FRONT VIEW

55″ display area 681.4 × 1210.6 mm (portrait) · footprint 744 × 500 mm

SIDE VIEW

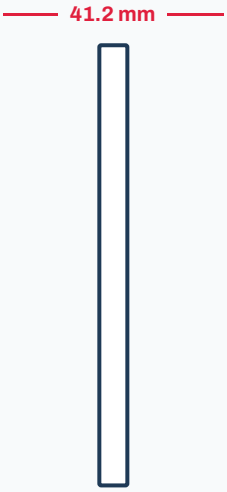

744	1911.5	41.2	744 × 500
WIDTH (MM)	HEIGHT (MM)	DEPTH (MM)	FOOTPRINT (MM)

Dimensional values taken from the manufacturer's technical drawing. Diagram is schematic and not to scale; confirm critical dimensions before fabrication or installation.