SVM50P5

50″ Full HD Commercial LCD Monitor · P5 Series

50″
DISPLAY SIZE

COMMERCIAL MONITOR

The SVM50P5 is a 50″ Full HD commercial LCD monitor from the P5 Series, built for retail, hospitality and corporate signage where a reliable screen is driven by an external player or PC. A 450 cd/m² panel with 1200:1 contrast and 178° viewing keeps content clear from any angle, and a slim 8.3 mm bezel suits multi-screen and portrait installs. Unlike a domestic TV, commercial-grade components and thermal design allow extended daily operation without the burn-in and reliability problems consumer panels develop in continuous use. HDMI, VGA and BNC inputs plus RS-232 control make it simple to integrate with existing AV infrastructure, media players, PCs and room-booking systems, and the screen can be mounted landscape or portrait on a standard VESA bracket. Built-in 2 × 2W speakers and a USB media player allow plug-and-play playback straight from a memory stick when no external source is needed, and every unit ships with a 3-year commercial warranty plus lifetime UK technical support.

KEY FEATURES

- Full HD 1920×1080
- 450 cd/m² Panel
- 8.3 mm Slim Bezel
- HDMI / VGA / BNC
- RS-232 Control
- USB Media Playback
- Built-in 2 × 2W Speakers
- Landscape / Portrait

AT A GLANCE

50″	1920×1080	450 cd/m²	1200:1	178°	88 W
PANEL SIZE	RESOLUTION	BRIGHTNESS	CONTRAST	VIEWING ANGLE	POWER

IDEAL APPLICATIONS

- Retail stores & shop-floor promotion
- Corporate signage & internal comms
- Showrooms & product displays
- Hospitality, bars & restaurant menus
- Reception & waiting areas
- Wayfinding & room-booking screens

Technical Specifications

PANEL

Panel size	50″
Resolution	1920 × 1080
Display area	1073.8 × 604 mm
Bezel size	8.3 mm
Pixel pitch	0.5593 × 0.5593 mm
Aspect ratio	16:9
Brightness	450 cd/m²
Colour	16.7M
Viewing angle	178°
Contrast ratio	1200:1

MECHANICAL

Unit size (W×H×D)	1090.4 × 621.3 × 56.9 mm
Package size	1241 × 754 × 193.7 mm
VESA holes	400 × 400 / 400 × 200 mm (M6)
Net / gross weight	18 / 22 kg
Orientation	Landscape / Portrait

AV, AUDIO & MEDIA

Video inputs	HDMI, VGA, BNC (AV)
Audio input	Audio socket 3.5mm
Control	RS-232
Speaker type	2W 8Ω ×2
Media formats	AVI, MP4 · MP3 · JPG, BMP
Media resolution	1920×1080 / 1080×1920

POWER & ENVIRONMENT

Power consumption	88W
Input voltage	AC 110–240V 50/60Hz
Operating temp.	0°C to 40°C
Storage temp.	-10°C to 55°C
Operating humidity	10–80%
Storage humidity	10–90%

ACCESSORIES & WARRANTY

Included	Remote control, user manual
Optional	Wall mount, floor stand/trolley, ceiling mount, table stand
Warranty	3 year · lifetime support

Specifications and availability are subject to change without notice. Trademarks are the property of their respective owners. Errors and omissions excepted.

Technical Drawing

All dimensions in millimetres — not to scale.

FRONT VIEW — WITH VESA PATTERN

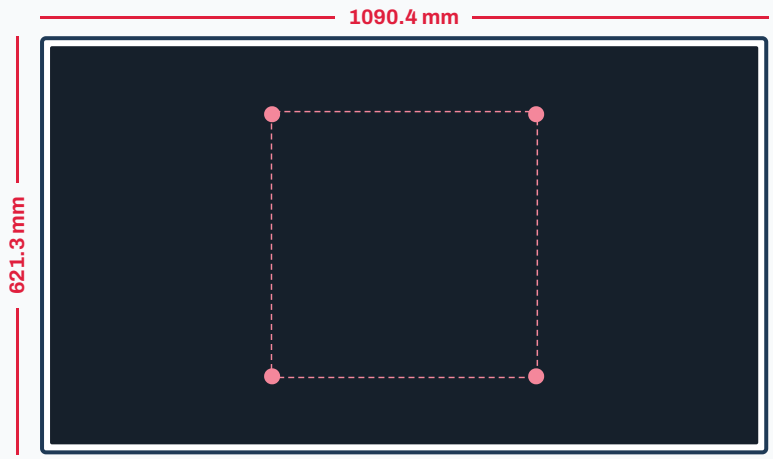

VESA 400 × 400 mm

50″ FHD display area 1073.8 × 604 mm · 8.3 mm side bezel

SIDE VIEW

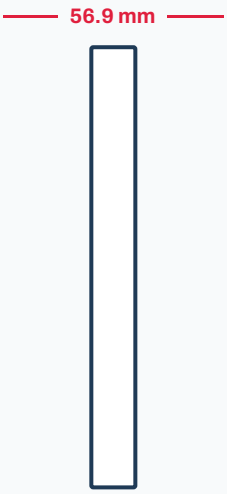

1090.4	621.3	56.9	400 × 400
WIDTH (MM)	HEIGHT (MM)	DEPTH (MM)	VESA (MM)

Dimensional values taken from the manufacturer's technical drawing. Diagram is schematic and not to scale; confirm critical dimensions before fabrication or installation.